



THE PERFECT SHOP

A product guide
for an efficient, reliable
and safe compressed
air system



PREVOST...
your best source
for premium products
for distributing and treating
compressed air !

PUSH BUTTON QUICK COUPLINGS

SAFETY

push button couplings

The coupling that puts safety first !

- Venting-action eliminates dangerous "Hose-whip" !
- One-hand connection is easy to operate !
- Leak-free design reduces energy costs !
















REGULAR

push button couplings

The "original" push button coupling !

- Light-weight, composite body is non-marring !
- One-hand connection is easy to operate !
- Impact-resistant design handles tough applications !
- Leak-free design reduces energy costs !

SAFETY	PROFILE	REGULAR
 ESI 07 - 1/4" Body size	 High flow	 ERC 07 - 1/4" Body size
 ISI 06 - 1/4" Body size	 Industrial profile ISO 6150 B	 IRC 06 - 1/4" Body size
 ASI 06 - 1/4" Body size	 ARO 210	 ARC 06 - 1/4" Body size
 USI 06 - 1/4" Body size	 Automotive TRUFLATE	 URC 06 - 1/4" Body size

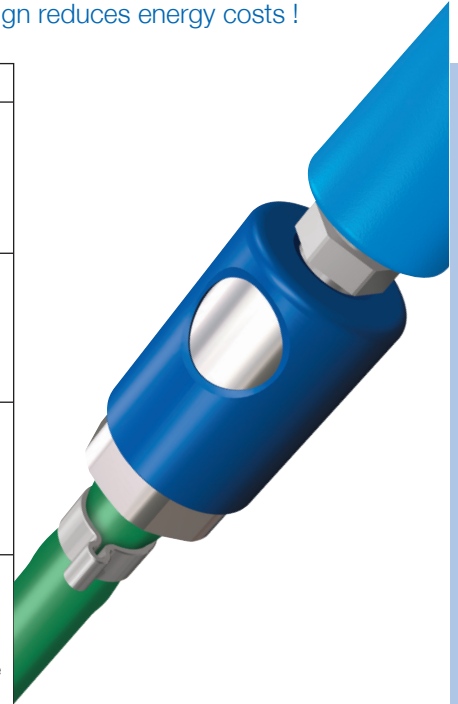

BLOW GUNS 27202

High performance blow guns for compressed air


- Sturdy construction
- Light weight
- Full pressure performance with variable flow
- Ergonomic design
- Available in OSHA compliant styles



SPIRAL HOSES PUS

Flexible and durable polyurethane spiral hose

- Excellent shape memory and extra-long service life
- Very flexible and resists kinking
- Abrasion resistant
- Rotating connector on operator end prevents twisting

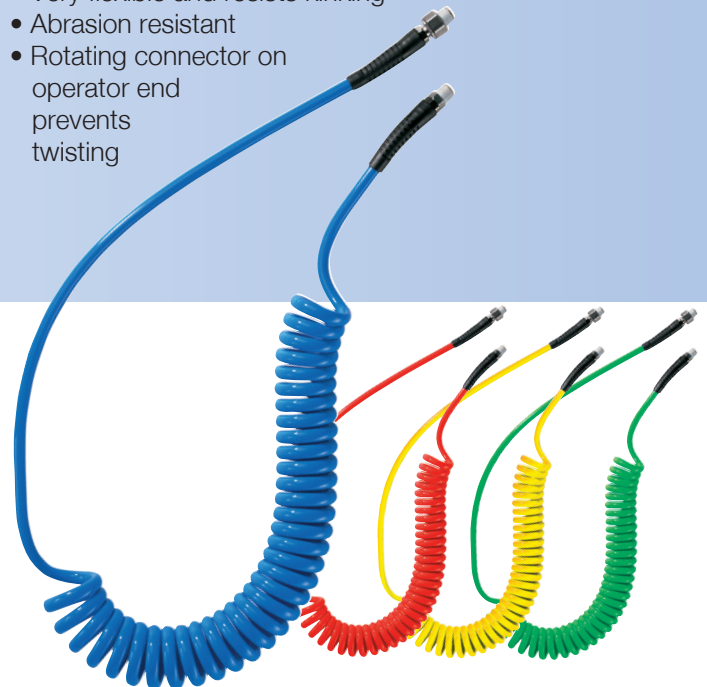

AIR PIPING SYSTEM **ALR**

High quality aluminum piping system for compressed air

- **Labor saving...** fast and easy to install and modify
- **Energy efficient...** smooth passages & sealed connections supply highly efficient air flow for life-long energy savings
- **Superior air quality...** ALR's non-corrosive materials deliver cleaner air that prolongs the life of air tools & equipment
- **Performance...** ALR's durable, shock-resistant components help build a lasting, high performance compressed air piping system
- **Versatile...** the ALR system can also be used for Nitrogen gas and other inert gases.



AIR TREATMENT UNITS **ALTO**

- **Air quality** Preservation and lubrication of pneumatic tools
- **Heavy duty** Sturdy construction. Aluminium alloy body
- **Modular construction** Fast easy installation and maintenance
- **User friendly** «Push to lock» adjusting knob for setting pressure



HOSE REELS

Streamline your workstations

- More efficient work stations
- Automatic hose locking system
- Keep work area safe and neat
- No more cut or broken hoses

AIR HOSES

Stoflex non-static hose

- Ideal for painting applications
- Very light and flexible, high resistance to oil



Airca automotive hose

- Ideal for automotive applications
- Heavy duty and highly durable hose





QUICK COUPLINGS

SAFETY QUICK COUPLINGS

- Use at air supply/wall
- Working pressure: 174 PSI
- Temp. range: + 5° F to 158° F
- Flow cap. @ 100 PSI ΔP 10 PSI:
 - ESI 07 - 73 SCFM
 - ISI 06 - 34 SCFM
 - USI 06 - 34 SCFM
 - ASI 06 - 32 SCFM

Warranty applied for couplers used with PREVOST compatible profile plugs.
Warranty is limited to the replacement of any parts deemed faulty, subject to proper usage and installation as recommended by PREVOST (temperature, pressure...)





REGULAR QUICK COUPLINGS

- Use at air supply
- Working pressure: 174 PSI
- Temp. range: + 5° F to 158° F
- Flow cap. @ 100 PSI ΔP 10 PSI:
 - ERC 07 - 34 SCFM
 - IRC 06 - 32 SCFM
 - URC 06 - 34 SCFM
 - ARC 06 - 25 SCFM

COUPLER 3/8" Body size







European high flow profile

SAFETY COUPLER			REGULAR COUPLER		
	1/4" FNPT 1/2" MNPT	ESI 071201 ESI 071253		1/4" FNPT	ERC 071201
PLUGS			PLUGS		
	1/4" FNPT 3/8" FNPT	ERP 076201 ERP 076202		1/4" MNPT 3/8" MNPT	ERP 076251 ERP 076252

COUPLER 1/4" Body size - ISO 6150/B profile



Industrial interchange





SAFETY COUPLER			REGULAR COUPLER		
	1/4" FNPT 1/2" MNPT	ISI 061201 ISI 061253		1/4" FNPT	IRC 061201
PLUGS			PLUGS		
	1/4" FNPT 3/8" FNPT	IRP 066201 IRP 066202		1/4" MNPT 3/8" MNPT	IRP 066251 IRP 066252

COUPLER 1/4" Body size - Truflate profile



Automotive interchange

NEW





SAFETY COUPLER			REGULAR COUPLER		
	1/4" FNPT 1/2" MNPT	USI 061201 USI 061253		1/4" FNPT	URC 061201
PLUGS			PLUGS		
	1/4" FNPT 3/8" FNPT	URP 066201 URP 066202		1/4" MNPT 3/8" MNPT	URP 066251 URP 066252

COUPLER 1/4" Body size




ARO profile

NEW





SAFETY COUPLER			REGULAR COUPLER		
	1/4" FNPT 1/2" MNPT	ASI 061201 ASI 061253		1/4" FNPT	ARC 061201
PLUGS			PLUGS		
	1/4" FNPT 3/8" FNPT	ARP 066201 ARP 066202		1/4" MNPT 3/8" MNPT	ARP 066251 ARP 066252








The full range of coupler available, see the Prevost General Catalog

ERGONOMIC AIR BLOW GUNS 27202




- Sturdy construction
- Protected mechanism. Due to its design the 27202 is protected against outside elements.
- Progressive flow: the progressive trigger action enables precise adjustments of the air flow rate
- Max. pressure: 145 PSI
- Operating temperature: 5° F to 158° F
- Thread: 1/4" FNPT
- Weight: 4.8 ozs
- Fluid: air
- Composite high-tech material, Inlet fitting with brass insert


	SPECIFICATIONS	PART #
	OSHA venturi nozzle	
	Thread: 1/4" FNPT	
	Consumption @ 87 PSI: 7.7 SCFM	
	Sound pressure level: 90 dB	27202 OSH
	Blower force @ 87 PSI: 9.5 Oz	
	Dynamic pressure @ 87 PSI @ .4": 17.40 PSI	
	OSHA silent nozzle	
	Thread: 1/4" FNPT	
	Consumption @ 87 PSI: 6.8 SCFM	
	Sound pressure level: 77 dB	27202 SIL
	Blower force @ 87 PSI: 7.5 Oz	
	Dynamic pressure @ 87 PSI @ .4": 0 PSI	
	Non-scratch nozzle	
	Thread: 1/4" FNPT	
	Consumption @ 87 PSI: 7.7 SCFM	
	Sound pressure level: 84 dB	27202 PRE
	Blower force @ 87 PSI: 11 Oz	
	Dynamic pressure @ 87 PSI @ .4": 29 PSI	
	Protective screen nozzle	
	Thread: 1/4" FNPT	
	Consumption @ 87 PSI: 13.8 SCFM	
	Sound pressure level: 82 dB	27202 ECR
	Blower force @ 87 PSI: 8 Oz	
	Dynamic pressure @ 87 PSI @ .4": 36.25 PSI	

	SPECIFICATIONS	PART #
	Metal tip blow gun	
	Thread: 1/4" FNPT	
	Consumption @ 87 PSI: 13.5 SCFM	
	Sound pressure level: 83 dB	27202 MTL
	Blower force @ 87 PSI: 13 Oz	
	Dynamic pressure @ 87 PSI @ 4": 18 PSI	
		
		
		
		
		
		

SPIRAL HOSES WITH FIXED AND ROTATING FITTINGS

- Polyurethane spiral hoses
- Flexible and kink resistant
- Minimum bend radius and excellent twist resistance
- Abrasion resistance
- Excellent shape memory and extra-long service life
- Working pressure: from 0 to 130 PSI
- Material: Polyether 95° shore A type Polyurethane
- Nickel plated fittings: with hose guard protector
- Minimum temperature: -40° F
- Maximum temperature: 160°F
- Color: blue (consult us for other colors)
- Pre-coated thread
- Rotating connector live swivel with ball bearing on the tool end




	Ø ID	Fixed fitting thread	Rotating fitting thread	Max. length	Part #
Spiral hose: PUS fixed and rotating fitting					
	5/16"	1/4" MNPT	1/4" MNPT	13'	PUS 264
	5/16"	1/4" MNPT	1/4" MNPT	20'	PUS 266
	3/8"	3/8" MNPT	3/8" MNPT	26'	PUS 288

HOSE REELS

- Hoses can recoil after use to create a safer and more efficient work area
- Adjustable length keeps area neat and reduces operator fatigue
- Automatic hose locking

Features

- Pressure: 175 PSI
- Temperature: 104°F
- Material: Epoxy-coated steel housing and spring
- Swivel bracket (Optional on DMO series)

	ID Hose	Length	Flow SCFM	Outlet NPT	Part #
DRF - Commercial medium polyurethane hose - Enclosed reel					
	5/16"	50'	18	1/4" MNPT	DRF 0815 N
	5/16"	40'	23	1/4" MNPT	DRF 0812 N
	3/8"	40'	30	3/8" MNPT	DRF 1012 N
	3/8"	33'	32	3/8" MNPT	DRF 1010 N
DSF - Commercial small polyurethane hose - Enclosed reel					
	5/16"	17'	23	1/4" MNPT	DSF 0805 N
	3/8"	10'	39	3/8" MNPT	DSF 1003 N
DMF - Premium medium polyurethane hose - Enclosed reel					
	5/16"	33'	18	1/4" MNPT	DMF 0810 N
DPF - Premium medium polyurethane hose - Enclosed reel					
	5/16"	40'	18	1/4" MNPT	DPF 0812 N
	3/8"	33'	32	3/8" MNPT	DPF 1010 N
DGF - Premium large polyurethane hose - Enclosed reel					
	3/8"	50'	24.7	3/8" MNPT	DGF 1015 N
	1/2"	33'	64	1/2" MNPT	DGF 1310 N
DMO - Medium rubber hose - Open reel					
	3/8"	33'	32	3/8" MNPT	DMO 1010 N
	3/8"	50'	25	3/8" MNPT	DMO 1015 N




AIR HOSES

STOFLEX - Non static hose

- Silicone free
- Very light and flexible, high resistance to oil
- Special design for paint shops and petrochemical industry
- Ideal for painting applications
- Temperature range: -20° F to 212° F
- Maximum working pressure: 300 PSI

AIRCA - Automotive hose


- EPDM rubber hose with synthetic braid
- Economical hose which remains flexible even at cold temperatures
- Heavy duty and highly durable hose
- Temperature range: - 40° F to 200° F
- Maximum working pressure: 200 PSI



	Ø int. diam	Thread	Length	Swivel	Part #
Painters hose assembly - STOFLEX - Non-static hose					
	3/8"	1/4" MNPT	4.5'	URC	USTO 3804FA
	3/8"	1/4" MNPT	35'	URC	USTO 3835FA
	3/8"	1/4" MNPT	50'	URC	USTO 3850FA
	3/8"	1/4" MNPT	4.5'	ERC	ESTO 3804FA
	3/8"	1/4" MNPT	35'	ERC	ESTO 3835FA
	3/8"	1/4" MNPT	50'	ERC	ESTO 3850FA
Hose - STOFLEX - Non-static hose					
	3/8"	1/4" MNPT	35'		STOFLEX 3835
	3/8"	1/4" MNPT	50'		STOFLEX 3850
	3/8"	NA	500'		STOFLEX 38500
Hose - AIRCA - Automotive hose					
	3/8"	1/4" MNPT	25'		AIRCA 3825
	3/8"	1/4" MNPT	50'		AIRCA 3850
	3/8"	NA	500'		AIRCA 38500

AIR TREATMENT UNITS **ALTO**







- Preservation and lubrication of pneumatic tools
- Reliable air regulation with high flow characteristics
- Sturdy construction - Aluminum alloy body
- Individual filter, regulator, lubricator units easily removable/mountable without disturbing the pipe line

- Temperature: 41°F to 140°F
- Working Pressure: 145 PSI
- Bowls: Polycarbonate with steel guard
- Bowl mounts: - Threaded type on 1/4" units
- Bayonet type on 3/8" and 1/2" units
- 25 micron standard. 5 micron available



SMALL 1/4 FNPT	Filtration	Air flow	PART #
	Filtre/regulator		
	(gauge, piping adapters and wall bracket included)		
	25 µ	19.43 SCFM	TM PSM201
	Filtre/regulator/lubricator		
	(gauge, piping adapters and wall bracket included)		
	25 µ	17.65 SCFM	TB PSM201

MEDIUM 3/8 FNPT	Filtration	Air flow	PART #
	Filtre/regulator		
	(gauge, piping adapters and wall bracket included)		
	25 µ	63.58 SCFM	TM PSM202
	Filtre/regulator/lubricator		
	(gauge, piping adapters and wall bracket included)		
	25 µ	44.15 SCFM	TB PSM202

LARGE 1/2 FNPT	Filtration	Air flow	PART #
	Filtre/regulator		
	(gauge, piping adapters and wall bracket included)		
	25 µ	105.96 SCFM	TM PSM203
	Filtre/regulator/lubricator		
	(gauge, piping adapters and wall bracket included)		
	25 µ	98.90 SCFM	TB PSM203
	Microfilter with regulator for paintbooth		
	(gauge, piping adapters and wall bracket included)		
	5 µ and 0.01 µ	52.95 SCFM	TB CSM203
	Air treatment unit on gantry		
	2-piece-set on gantry - Filter-Regulator-Lubricator with gauge and diverter block		
	25 µ - 3 non-lubricated outlets		
	Coupler:		
	Truflate profile	2 x 34 CFM	PTE TUS
	ISO B profile	2 x 34 CFM	PTE TIS
	High Flow profile	2 X 73 CFM	PTE TES
	Air treatment unit on gantry		
	2-piece-set on gantry - Microfilter assembly with regulator and gauge		
	25 µ and 0.01 µ		
	Coupler:		
	Truflate profile	2 x 34 CFM	PTC TUS
	ISO B profile	2 x 34 CFM	PTC TIS
	High Flow profile	2 x 73 CFM	PTC TES
	Tube inlet	Volt	PART #
	Automatic drain system		
	Kit includes:- electric drain, impurity collector, swivel male elbow, adapter, union male for aluminum pipe		
	Ø 20 mm	110	TEMP ALR20
	Ø 25 mm	110	TEMP ALR25

AIR PIPING SYSTEM **ALR**

- Labor saving: fast and easy to install and modify
- Energy efficient: smooth passages & sealed connections supply highly efficient air flow for life-long energy savings
- Superior air quality: ALR's non-corrosive materials deliver cleaner air that prolongs the life of air tools & equipment
- Performance: ALR's durable, shock-resistant components help build a lasting, high performance compressed air piping system

PIPE

- Construction: Ductile aluminium alloy 6060T6
Density: 2.7kg/dm³
- Usage : Compressed air, inert gases
- Outer coating: Blue Epoxy
- Pipe length: 19.7 ft

FITTING

Aluminum fittings available in some sizes

- Body: Polyamide
- Seal: Nitrile
- Pusher: Polyamide
- Nut: Polyamide
- Lock ring: 316L stainless steel

- Working Pressure:
188 PSI at 100°F


INSTALLING AIR DROPS

- Tapping flanges
provides easy connections
to the ringmain
and dry and clean air
to the point of use


Certified by TSSA-TUV
Conforms to ASME B31.1




Warranty is limited to the replacement of any parts deemed faulty, subject to proper usage and installation as recommended by Prevost.

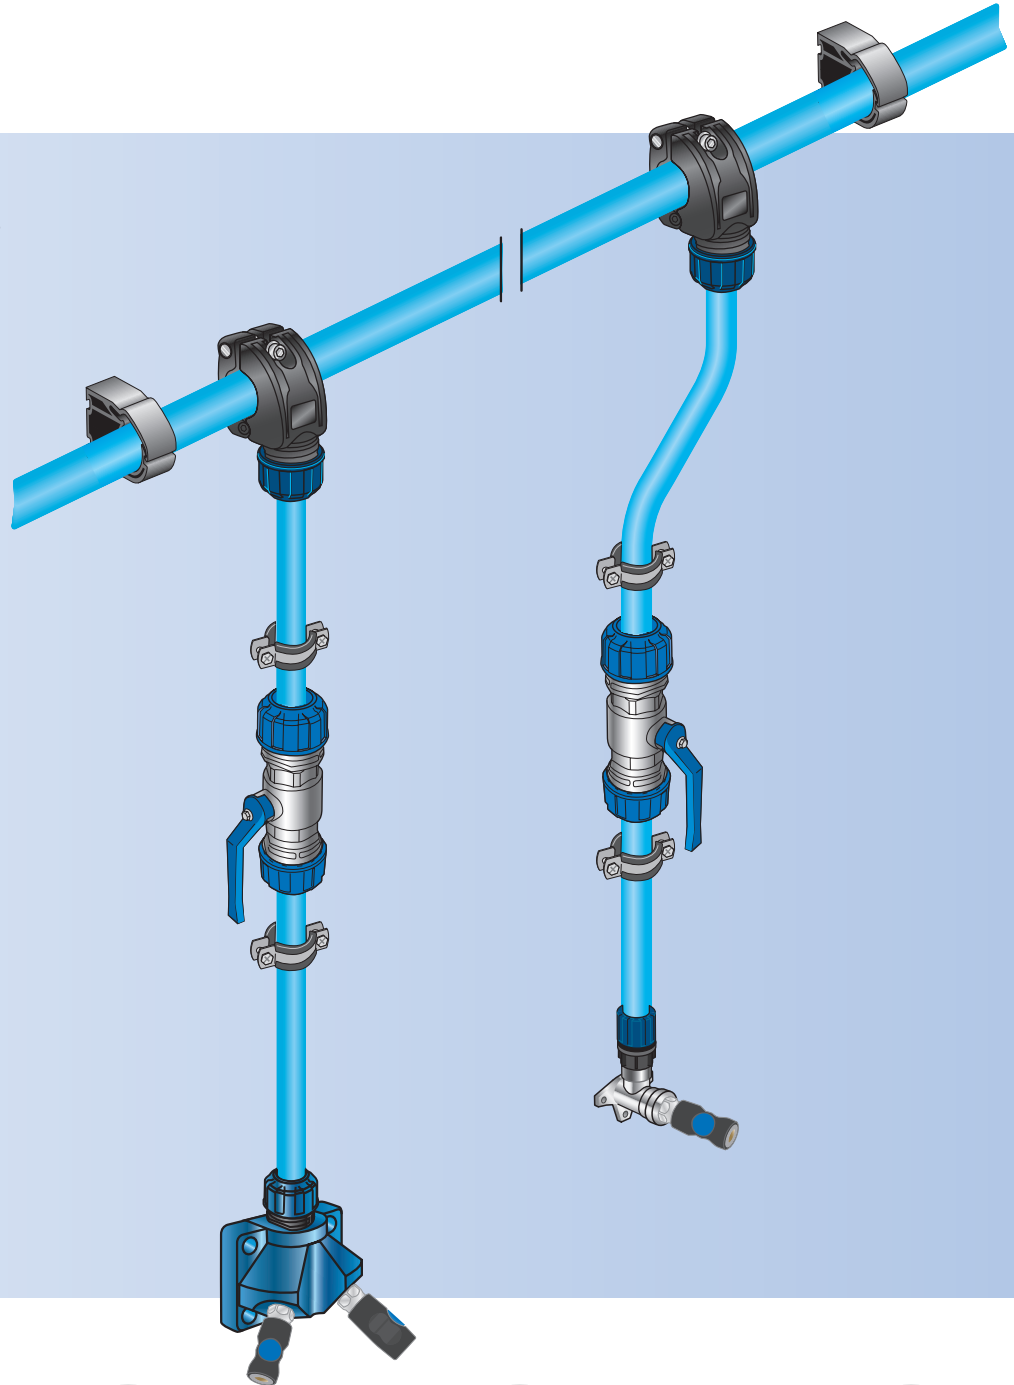


ASSEMBLING




1 - Cut



2 - Chamfer & mark pipe


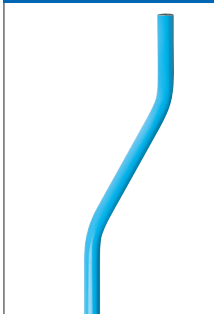
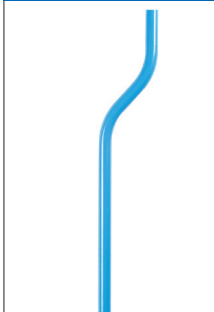




3 - Loosen nut
& insert pipe



4 - Tighten nut 1/2 turn past
"hand tight" with wrench

AIR PIPING SYSTEM **ALR**

		SIZE / TYPE	PART #
Aluminum piping			
	Outer dia.	Length ft	
	20 mm	19.70	ALR TU20L6
	25 mm	19.70	ALR TU25L6
	32 mm	19.70	ALR TU32L6
	40 mm	19.70	ALR TU40L6
	50 mm	19.70	ALR TU50L6
	63 mm	19.70	ALR TU63L6
	80 mm	19.70	ALR TU80L6
Long bended link pipe			
	Pipe size		
	20 mm		ALR LM20
	25 mm		ALR LM25
Short bended link pipe			
	Pipe size		
	20 mm		ALR LMC20
	25 mm		ALR LMC25
Tapping flange to ALR			
	Main size	Drop size	
	25 mm	20 mm	ALR BP2520
	32 mm	20 mm	ALR BP3220
	40 mm	20 mm	ALR BP4020
	40 mm	25 mm	ALR BP4025
	50 mm	20 mm	ALR BP5020
	50 mm	25 mm	ALR BP5025
	63 mm	20 mm	ALR BP6320
	63 mm	25 mm	ALR BP6325
	63 mm	32 mm	ALR BP6332
	80 mm	20 mm	ALR BP8020
	80 mm	25 mm	ALR BP8025
80 mm	32 mm	ALR BP8032	
Tapping flange to ALR			
	Main size	Drop size FNPT	
	25 mm	1/2"	AVR BT25203
	32 mm	1/2"	AVR BT32203
	40 mm	1/2"	AVR BT40203
	40 mm	3/4"	AVR BT40204
	50 mm	1/2"	AVR BT50203
	50 mm	3/4"	AVR BT50204
	63 mm	1/2"	AVR BT63203
	63 mm	3/4"	AVR BT63204
	63 mm	1"	AVR BT63205



	SIZE / TYPE	PART #
Union		
	<i>Tube OD</i>	
	20 mm	ALR UN20
	25 mm	ALR UN25
	32 mm	ALR UN32
	40 mm	ALR UN40
	50 mm	ALR UN50
Aluminum female union		
	<i>Tube OD</i>	
	63 mm	ALR UNA63
	80 mm	ALR UNA80
Union elbow 45°		
	<i>Tube OD</i>	
	20 mm	ALR 4C20
	25 mm	ALR 4C25
	32 mm	ALR 4C32
	40 mm	ALR 4C40
	50 mm	ALR 4C50
	63 mm	ALR 4C63
Union elbow 90°		
	<i>Tube OD</i>	
	20 mm	ALR 9C20
	25 mm	ALR 9C25
	32 mm	ALR 9C32
	40 mm	ALR 9C40
	50 mm	ALR 9C50
Aluminum union elbow 90°		
	<i>Tube OD</i>	
	63 mm	ALR 9CA63
	80 mm	ALR 9CA80

AIR PIPING SYSTEM **ALR**

		SIZE / TYPE	PART #
Union tee			
	Tube OD		
	20 mm		ALR TE20
	25 mm		ALR TE25
	32 mm		ALR TE32
	40 mm		ALR TE40
	50 mm		ALR TE50
Aluminum union tee			
	Tube OD		
	63 mm		ALR TEA63
	80 mm		ALR TEA80
Reducing branch tee			
	Main size	Branch size	
	25 mm	20 mm	ALR TR2520
	32 mm	20 mm	ALR TR3220
	32 mm	25 mm	ALR TR3225
	40 mm	20 mm	ALR TR4020
	40 mm	25 mm	ALR TR4025
	40 mm	32 mm	ALR TR4032
	50 mm	25 mm	ALR TR5025
	50 mm	35 mm	ALR TR5035
	50 mm	40 mm	ALR TR5040
Tee piece			
	Tube OD	FNPT	
	20 mm	1/2"	ALR TT20203
	25 mm	1/2"	ALR TT25203
Union male thread MNPT (polyamide)			
	Pipe size	MNPT	
	20 mm	1/2"	ALR PM20253
	20 mm	3/4"	ALR PM20254
	25 mm	1/2"	ALR PM25253
	25 mm	3/4"	ALR PM25254
	25 mm	1"	ALR PM25255
	32 mm	1"	ALR PM32255
	32 mm	1-1/4"	ALR PM32256
	40 mm	1"	ALR PM40255
	40 mm	1-1/4"	ALR PM40256
	40 mm	1-1/2"	ALR PM40257
	50 mm	1-1/2"	ALR PM50257
	50 mm	2"	ALR PM50258
Union male thread MNPT (metal)			
	Pipe size	MNPT	
	20 mm	1/2"	ALR MM20253
	20 mm	3/4"	ALR MM20254
	25 mm	1"	ALR MM25255
	32 mm	1-1/4"	ALR MM32256
	40 mm	1-1/2"	ALR MM40257
	50 mm	2"	ALR MM50258

		SIZE / TYPE	PART #
Aluminum union male thread MNPT (metal)			
	Pipe size	MNPT	
	63 mm	2-1/2"	ALR MMA63259
	80 mm	2-1/2"	ALR MMA80259
	80 mm	3"	ALR MMA802510
Union female thread FNPT (metal)			
	Pipe size	FNPT	
	20 mm	1/2"	ALR MF20203
	20 mm	3/4"	ALR MF20204
	25 mm	1"	ALR MF25205
	32 mm	1-1/4"	ALR MF32206
	40 mm	1-1/2"	ALR MF40207
	50 mm	2"	ALR MF50208
Union female metal thread FNPT			
	Pipe size	FNPT	
	63 mm	2-1/2"	ALR MFA63209
Pipe cap			
	Pipe size		
	20 mm		ALR BO20
	25 mm		ALR BO25
	32 mm		ALR BO32
	40 mm		ALR BO40
	50 mm		ALR BO50
Aluminum pipe cap			
	Pipe size		
	63 mm		ALR BOA63
	80 mm		ALR BOA80
Reducing union			
	Pipe size	Pipe size	
	25 mm	20 mm	ALR MR2520
	32 mm	25 mm	ALR MR3225
	40 mm	32 mm	ALR MR4032
	50 mm	40 mm	ALR MR5040
ALR piping ball valve			
	Pipe size		
	20 mm		ALR RIM20
	25 mm		ALR RIM25
	35 mm		ALR RIM32
	40 mm		ALR RIM40
	50 mm		ALR RIM50

AIR PIPING SYSTEM **ALR**

	SIZE / TYPE		PART #
Full flow ball valve FNPT / FNPT			
	1/4"		RSI 201
	3/8"		RSI 202
	1/2"		RSI 203
	3/4"		RSI 204
	1"		RSI 205
	1-1/4"		RSI 206
	1-1/2"		RSI 207
	2"		RSI 208
Female wall bracket with drain			
	Inlet FNPT	Outlet FNPT	
	1/2"	2 x 1/2"	AVR Y21212P
	3/4"	2 x 1/2"	AVR Y22712P
Wall bracket with drain			
	Union male for tube inlet	Outlet FNPT	
	20 mm	2 x 1/2"	ALR YP220
	25 mm	2 x 1/2"	ALR YP225
Wall bracket with couplings and drain			
	Tube Inlet	2 safety couplings	
	Industrial interchange profile		
	20 mm	ISC 061253	ALR YIP220
	25 mm	ISC 061253	ALR YIP225
	Truflate profile		
	20 mm	USC 061253	ALR YUP220
	25 mm	USC 061253	ALR YUP225
	High flow profile		
	20 mm	ESI 071253	ALR YESP220
	25 mm	ESI 071253	ALR YESP225
	ARO profile		
	20 mm	ASC 061253	ALR YAP220
	25 mm	ASC 061253	ALR YAP225
Manual drain			
	MA-Drain	BSP 1/4"	MA 14
Single part wall brackets			
	Inlet MNPT	Outlet FNPT	
	1/2"	1/2"	AVR AFM212
Single part wall brackets			
	Inlet FBSP	Outlet FBSP	
	1/2"	1/2"	AVR AFF12

		SIZE / TYPE	PART #
Nut & grip ring			
	Pipe size		
	20 mm		ALR ECG20
	25 mm		ALR ECG25
	32 mm		ALR ECG32
	40 mm		ALR ECG40
	50 mm		ALR ECG50
Aluminum nut & grip ring			
	Pipe size		
	63 mm		ALR EAG63
	80 mm		ALR EAG80
Seal & pusher			
	Pipe size		
	20 mm		ALR JTB20
	25 mm		ALR JTB25
	32 mm		ALR JTB32
	40 mm		ALR JTB40
	50 mm		ALR JTB50
Aluminum seal & pusher			
	Pipe size		
	63 mm		ALR JAB63
	80 mm		ALR JAB80
M8 threaded pipe clamp (with 8 mm nut)			
	Pipe size		
	20 mm		AVR CI20
	25 mm		AVR CI25
	32 mm		AVR CI32
	40 mm		AVR CI40
	50 mm		AVR CI50
	63 mm		AVR CI63
	80 mm		AVR CI80
Beam clip			
	Beam thickness		
	Min	Max	
	.11"	.31"	CP 38
	.31"	.55"	CP 814
	.55"	.78"	CP 1420
	Up to .63" max		CP 016
Metal supports & screw			
	Length		
	5.9"		CS 150L
	11.8"		CS 300L
	17.7"		CS 450L
	20"		CS 500L
	8 mm mounting screw		CS VIS

AIR PIPING SYSTEM ACCESSORIES

	SIZE / TYPE	PART #	
M8 threaded hanger			
	Pipe size		
	20 mm	CPF 20	
	25 mm	CPF 25	
	32 mm	CPF 32	
	40 mm	CPF 40	
	50 mm	CPF 50	
	63 mm	CPF 63	
	80 mm	CPF 80	
Mounting hardware			
	8 mm threaded rod		
	Length 1 m (39.3 in)	TF M8100	
	Union connector	TL RM8	
	M8 nut	TE M8	
	M8 male x 3/8" UNC female thread adapter	TA M8FU	
	Male-male strut	TL M8	
	55 mm AOL		
	Lag screw - Ø 8 mm		
	Length: 50 mm	TTF 850	
	Length: 80 mm	TTF 880	
	VBA screw - Ø 6 mm		
	Length: 60 mm	TVB 660	
	Length: 90 mm	TVB 690	
	Threaded bolt - Ø 8 mm		
	Length: 60 mm	TVM 860	
M8 threaded galvanised stud			
	Length		
	50 mm	PV 80	
Flexible link MNPT & MNPT			
	Length	Threads	
	4.90 ft	1/2"	LEM 253
	4.90 ft	3/4"	LEM 254
	4.90 ft	1"	LEM 255
	7.20 ft	1-1/4"	LEM 256
	8.20 ft	1-1/2"	LEM 257
	6.50 ft	2"	LEM 258

	SIZE / TYPE	PART #
Deburring / chamfer tools		
	1 - Metal body tool	
	20 mm - 40 mm	AVR CHE50
	2 - Plastic body tool 5 blades	
	20 mm - 50 mm	AVR CHE50P
	3 - Deburring	
	inside/outside TA M8FU	AVR CHERAP
	4 - Chamfering tool	
	20 mm to 110 mm	PVR CHE110
Chamfering tool for drill		
	With adaptor for drills	
	Pipe sizes 20 to 40	AVR EBA
Pipe cutter		
	<i>Pipe size</i>	
	20 to 63 mm	ALR CTU63
	50 to 110 mm	PVR CTU110
Wrench		
	<i>Pipe size</i>	
	20 to 32 mm	ALR CLE32
	40 to 63 mm	ALR CLE63
Pipe sealing cord		
	Use to seal all threaded connections	
	<i>Length in ft</i>	
	492	FLT 150
Anaerobic sealant		
	1.70 oz tube - Seals 1/8" to G 1" threads in 2 hours. Immediate curing @ 77° F Pressure strenght: 87 PSI For steel and nickel-plated brass parts Shear strenght: 17-23 N/mm2 after 24 hours	
	50 ml tube	ETANCHE 177



Prevost Corporation - PO Box 17708 - Greenville, SC 29607
 Phone: (800) 845-7220 - Fax: (864) 284-6428
 E mail: sales.corp@prevostusa.com - www.prevostusa.com

Download the Perfect Shop at:
www.prevostusa.com/perfectshop

SHOP DOCUS11

Published by Prevost - 05-2011
 This document may not be deemed contractually binding.
 To provide better service for customers, Prevost reserves the right to alter product characteristics without notice.